

Trek Model PZD350A

Piezo Driver/Power Amplifier



The Trek Model PZD350A is a high-voltage DC-stable piezo driver/amplifier designed to provide precise control of output voltages in bipolar or unipolar ranges that are customer specified within a range of available settings. It is configured as a noninverting amplifier with a variable DC gain. An inverting amplifier configuration is also available.

The unit features an all-solid-state design, a high slew rate and a four-quadrant active output stage which sinks or sources current into reactive or resistive loads throughout the output voltage range. This capability is essential for achieving the accurate output responses and high slew rates demanded by reactive loads.

Key Specifications


- | | | |
|--------------------------|-----------|---|
| • Output Voltage Range | Bipolar: | 0 to ± 350 V DC or peak AC |
| | Unipolar: | 0 to +700 V DC or peak AC or 0 to -700 VDC or peak AC |
| • Output Current Range | Bipolar: | 0 to ± 200 mA |
| | Unipolar: | 0 to ± 100 mA |
| • Slew Rate | Bipolar: | Greater than 550 V/ μ s |
| • | Unipolar: | Greater than 440 V/ μ s |
| • Large Signal Bandwidth | Bipolar: | DC to greater than 250 kHz (-3 dB); DC to greater than 90 kHz (1% distortion) |
| • | Unipolar: | DC to greater than 200 kHz (-3 dB); DC to greater than 70 kHz (1% distortion) |
| • Small Signal Bandwidth | Bipolar: | DC to greater than 350 kHz (-3 dB) |
| • | Unipolar: | DC to greater than 250 kHz (-3 dB) |
| • DC Voltage Gain: | | 0 to 150 V/V, adjustable using a front panel potentiometer |

Typical Applications Include

- Piezoelectric driving/control
- Laser modulation
- MEMS
- Semiconductor research
- Piezoelectric vibration damping

Features and Benefits

- Four-quadrant output for driving capacitive loads
- Closed loop system for high accuracy
- Short-circuit protected for equipment protection
- All solid-state design for maintenance-free operation
- DC-stable for programmable supply applications
- Low output noise for ultra-accurate outputs
- Model PZD350A M/S is also available with twice the current capability of the Model PZD350A
- NIST-traceable Certificate of Calibration provided with each unit
- CE compliant

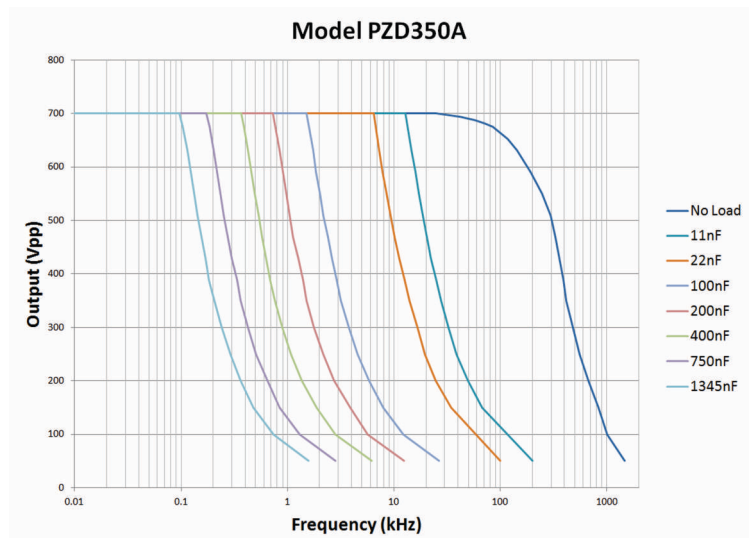

TREK • 190 Walnut Street • Lockport, NY 14094 • USA
800-FOR TREK • 716-438-7555 • 716-201-1804 (fax)
www.trekinc.com • sales@trekinc.com

Model PZD350A Specifications

Performance

| | |
|--|---|
| Output Voltage Bipolar Range | 0 to ± 350 V DC or peak AC |
| Output Voltage Unipolar Range | 0 to +700 V DC or 0 to -700 V DC or peak AC |
| Output Current Bipolar Range | 0 to ± 200 mA |
| Output Current Unipolar Range | 0 to ± 100 mA |
| Input Voltage Range | 0 to ± 10 V DC or peak AC |
| Input Impedance | 90 k Ω , nominal (non-inverting) 1 M Ω nominal, (inverting) |
| DC Voltage Gain | 0 to 150 V/V |
| DC Voltage Gain Accuracy | Better than 0.1% for factory set gain of 100 V/V (input to output) |
| Offset Voltage | Less than ± 500 mV |
| Output Noise (all ranges)* | Less than 100 mV rms to 20 kHz w/100 pF load Less than 150 mV rms to 20 kHz with no load |
| Slew Rate (10% to 90%, typical) | Bipolar: Greater than 550 V/ μ s Unipolar: Greater than 440 v/ μ s |
| Large Signal Bandwidth (-3 dB) | Bipolar: DC to greater than 250 kHz Unipolar: DC to greater than 200 kHz |
| Large Signal Bandwidth (1% distortion) | Bipolar: DC to greater than 90 kHz Unipolar: DC to greater than 70 kHz |
| Small Signal Bandwidth (-3dB) | Bipolar: DC to greater than 350 kHz Unipolar: DC to greater than 250 kHz |
| Settling Time to 1% | Less than 30 μ s when critically damped |
| Stability | With a set gain of 100 V/V |
| <i>Drift with Time</i> | Less than 50 ppm/hr, noncumulative |
| <i>Drift with Temp</i> | Less than 100 ppm/ $^{\circ}$ C |

Voltage Monitor

| | |
|-------|------------------------------------|
| Ratio | 1/100th of the high voltage output |
|-------|------------------------------------|

Current Monitor

| | |
|-------|------------------------------------|
| Ratio | 0.05 V/mA, $\pm 1\%$ of full scale |
|-------|------------------------------------|

Features

| | |
|----------------|--|
| Digital Enable | BNC connection for TTL compatible signal to turn ON/OFF the HV output for each channel |
| Gain Control | The gain of the Model PZD350A is adjustable to 150 V/V |

Features (cont.)

| | |
|-----------------------|---|
| Dynamic Adjustment | A graduated 1-turn front panel potentiometer is used to optimize the AC response of the output signal for various load configurations |
| Input Configuration | The input is configured as a noninverting amplifier. An inverting amplifier is also available |
| Limit Indicator | An amber indicator warns when the PZD350A fails to produce the required HV output |
| Automatic Power Limit | Automatically limits the internal power dissipation to protect the PZD350A from overheating |

Mechanical

| | |
|----------------------------|---|
| Dimension - Single Channel | 110 mm H x 220 mm W x 445 mm D (4.3" H x 8.7" W x 17.5" D) |
| Dual Channel | 110 mm H x 432 mm W 445 mm D (4.3" H x 17" W x 17.5" D) |
| Weight - Single | 5 kg (11 lb) |
| Dual | 10 kg (22 lb) |
| HV Connector | SHV High Voltage Connector |

Operating Conditions

| | |
|-------------------|---|
| Temperature | 0 $^{\circ}$ C to 40 $^{\circ}$ C (32 $^{\circ}$ F to 104 $^{\circ}$ F) |
| Relative Humidity | To 85%, noncondensing |
| Altitude | To 2000 meters (6561.68 ft.) |

Electrical

| | |
|--------------------|---|
| Line Voltage | Factory Set for one of two ranges: 90 to 127 V AC or 180 to 250 V AC, either at 48 to 63 Hz |
| AC Line Receptacle | Standard 3-prong with integral fuse holder |
| Power Consumption | 90 VA, single channel 175 VA, dual channel |

Supplied Accessories

| | |
|--------------------------|---|
| HV Cable | 2 m, 30.8pf/ft @ 1kHz, nominal. |
| Operators' Manual | PN: 23432 |
| HV Output Cable Assembly | PN: 43874R cable and SHV mating connector |
| Line Cord, Fuses | Selected per geographic destination |

Ordering Information

| | |
|-----------------|---------------------------------|
| 90 to 127 V AC | Model PZD350A-1-L (single unit) |
| 90 to 127 V AC | Model PZD350A-2-L (dual unit) |
| 180 to 250 V AC | Model PZD350A-1-H (single unit) |
| 180 to 250 V AC | Model PZD350A-2-H (dual unit) |

Notes

The Model PZD350A comes from the factory with settings for an output voltage of ± 350 V DC or peak AC, a voltage gain ratio of 100 V/V, with a noninverting input. Please specify voltage range (± 350 V, +700 V, or -700 V) and input configuration (inverting or noninverting) when ordering. Also available is the Model PZD350A M/S with twice the current capability of the standard PZD350A.

*Measured using the true rms feature of the HP Model 34401A digital multimeter

Copyright © 2012 TREK, INC. All specifications are subject to change. 1237/DEC



TREK • 190 Walnut Street • Lockport, NY 14094 • USA
800-FOR TREK • 716-438-7555 • 716-201-1804 (fax)
www.trekinc.com • sales@trekinc.com

